



ASK 41.3




PB_ASK41.3_online-zoom.jpg

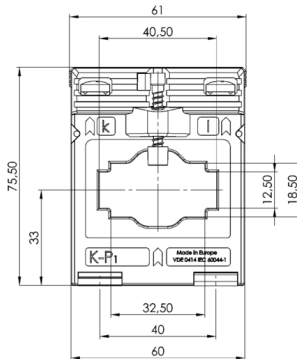

TZ_ASK41.3_F_online-zoom.jpg

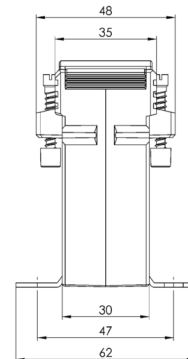

TZ_ASK41.3_S_online-zoom.jpg



TZ_ASK41.3_T_online-zoom.jpg

Description

Plug-in current transformer for primary nominal currents from 100 A up to 750 A, secondary nominal current 5 A or 1 A (optional 2 A), accuracy class 1.

Technical Data

- Therm. nominal continuous current I_{cth} : $1,0 \times I_N$
- Therm. nominal short-time current I_{th} : $60 \times I_N$, 1 sec.
- Max. operating voltage U_m : 0.72 kV
- Isolation test voltage: 3 kV, U_{eff} , 50 Hz, 1 min.
- Nominal rated frequency: 50...60 Hz
- Isolation class: E
- Bus bar 1: 40 x 12 mm
- Bus bar 2: 32 x 18 mm
- Round conductor: 26 mm
- Width: 61 mm
- Height: 75,5 mm
- Depth: 48 mm

type description	type name	type number	primary current	secondary current	VA	accuracy
ASK 41.3 100/5A 1VA Kl.1	ASK	41.3	100	5	1	1
ASK 41.3 100/5A 1,5VA Kl.1	ASK	41.3	100	5	1,5	1
ASK 41.3 150/5A 1,5VA Kl.1	ASK	41.3	150	5	1,5	1
ASK 41.3 150/5A 2,5VA Kl.1	ASK	41.3	150	5	2,5	1

ASK 41.3 200/5A ASK	41.3	200	5	1,5	1
1,5VA Kl.1					
ASK 41.3 200/5A ASK	41.3	200	5	2,5	1
2,5VA Kl.1					
ASK 41.3 250/5A ASK	41.3	250	5	1,5	1
1,5VA Kl.1					
ASK 41.3 250/5A ASK	41.3	250	5	2,5	1
2,5VA Kl.1					
ASK 41.3 300/5A ASK	41.3	300	5	1,5	1
1,5VA Kl.1					
ASK 41.3 300/5A ASK	41.3	300	5	2,5	1
2,5VA Kl.1					
ASK 41.3 300/5A ASK	41.3	300	5	5	1
5VA Kl.1					
ASK 41.3 400/5A ASK	41.3	400	5	1,5	1
1,5VA Kl.1					
ASK 41.3 400/5A ASK	41.3	400	5	2,5	1
2,5VA Kl.1					
ASK 41.3 400/5A ASK	41.3	400	5	5	1
5VA Kl.1					
ASK 41.3 500/5A ASK	41.3	500	5	1,5	1
1,5VA Kl.1					
ASK 41.3 500/5A ASK	41.3	500	5	2,5	1
2,5VA Kl.1					
ASK 41.3 500/5A ASK	41.3	500	5	5	1
5VA Kl.1					
ASK 41.3 600/5A ASK	41.3	600	5	1,5	1
1,5VA Kl.1					
ASK 41.3 600/5A ASK	41.3	600	5	2,5	1
2,5VA Kl.1					
ASK 41.3 600/5A ASK	41.3	600	5	5	1
5VA Kl.1					
ASK 41.3 750/5A ASK	41.3	750	5	2,5	1
2,5VA Kl.1					
ASK 41.3 750/5A ASK	41.3	750	5	5	1
5VA Kl.1					
ASK 41.3 750/5A ASK	41.3	750	5	10	1
10VA Kl.1					
ASK 41.3 100/1A ASK	41.3	100	1	1	1
1VA Kl.1					
ASK 41.3 100/1A ASK	41.3	100	1	1,5	1
1,5VA Kl.1					

ASK 41.3 150/1A ASK	41.3	150	1	1,5	1
1,5VA Kl.1					
ASK 41.3 150/1A ASK	41.3	150	1	2,5	1
2,5VA Kl.1					
ASK 41.3 200/1A ASK	41.3	200	1	1,5	1
1,5VA Kl.1					
ASK 41.3 200/1A ASK	41.3	200	1	2,5	1
2,5VA Kl.1					
ASK 41.3 250/1A ASK	41.3	250	1	1,5	1
1,5VA Kl.1					
ASK 41.3 250/1A ASK	41.3	250	1	2,5	1
2,5VA Kl.1					
ASK 41.3 250/1A ASK	41.3	250	1	5	1
5VA Kl.1					
ASK 41.3 300/1A ASK	41.3	300	1	1,5	1
1,5VA Kl.1					
ASK 41.3 300/1A ASK	41.3	300	1	2,5	1
2,5VA Kl.1					
ASK 41.3 300/1A ASK	41.3	300	1	5	1
5VA Kl.1					