



EASK 31.5




PB_EASK31.5_online-zoom.jpg

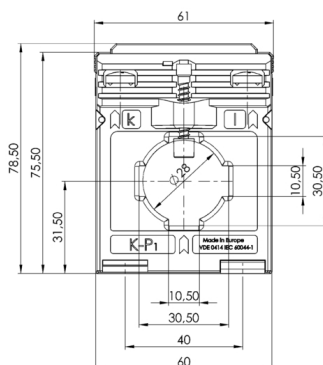

TZ_EASK31.5_F_online-zoom.jpg

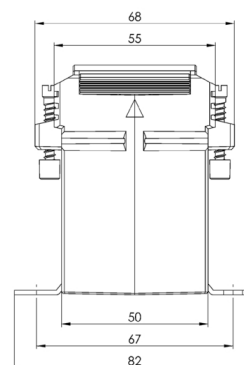

TZ_EASK31.5_S_online-zoom.jpg



TZ_EASK31.5_T_online-zoom.jpg

Description

Plug-in current transformer for primary nominal currents from 75 A up to 750 A, secondary nominal current 5 A or 1 A, accuracy class 0.2s, 0.2, 0.5s and 0.5, PTB Braunschweig certificated for tariff application.

Technical Data

- Therm. nominal continuous current I_{cth} : $1,2 \times I_N$
- Therm. nominal short-time current I_{th} : $60 \times I_N$, 1 sec.
- Max. operating voltage U_m : 0.72 kV
- Isolation test voltage: 3 kV, U_{eff} , 50 Hz, 1 min.
- Nominal rated frequency: 50...60 Hz
- Isolation class: E
- Bus bar 1: 30 x 10 mm
- Bus bar 2: 2 x 20 x 10 mm
- Round conductor: 28 mm
- Width: 61 mm
- Height: 78,5 mm
- Depth: 68 mm