



SASK 41.6




PB_ASK41.6_online-zoom.jpg

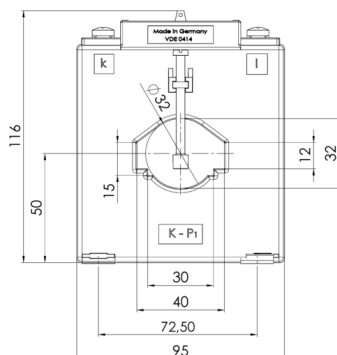

TZ_ASK41.6_F_online-zoom.jpg

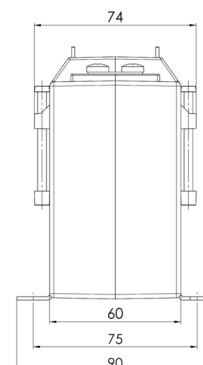

TZ_ASK41.6_S_online-zoom.jpg



TZ_ASK41.6_T_online-zoom.jpg

Description

Protection plug-in current transformers for primary nominal currents from 100 A up to 600 A, secondary nominal current 5 A or 1 A (optional 2A) in protection class 5P5, 10P5, 5P10 and 10P10.

Technical Data

- Therm. nominal continuous current I_{cth} : $1,2 \times I_N$
- Therm. nominal short-time current I_{th} : $60 \times I_N$, 1 sec.
- Max. operating voltage U_m : 0.72 kV
- Isolation test voltage: 3 kV, U_{eff} , 50 Hz, 1 min.
- Nominal rated frequency: 50...60 Hz
- Isolation class: E
- Bus bar 1: 40 x 12 mm
- Bus bar 2: 30 x 15 mm
- Round conductor: 32 mm
- Width: 95 mm
- Height: 116 mm
- Depth: 74 mm