



## WSK 31.5




PB\_WSK31.5\_online-zoom.jpg

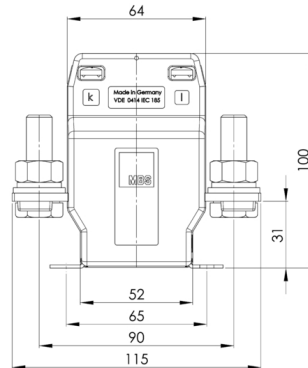

TZ\_WSK31.5\_F\_online-zoom.jpg

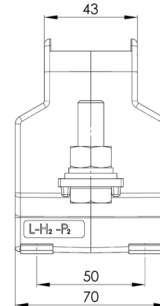

TZ\_WSK31.5\_S\_online-zoom.jpg



TZ\_WSK31.5\_T\_online-zoom.jpg

### Description

Wound current transformer for primary nominal currents from 25 A up to 150 A, secondary nominal current 5 A or 1 A (optional 2 A), accuracy class 0.5 and 1 (optional in class 0.2 and 0.5s).

### Technical Data

- Therm. nominal continuous current  $I_{cth}$ :  $1,0 \times I_N$
- Therm. nominal short-time current  $I_{th}$ :  $60 \times I_N$ , 1 sec.
- Max. operating voltage  $U_m$ : 0.72 kV
- Isolation test voltage: 3 kV,  $U_{eff}$ , 50 Hz, 1 min.
- Nominal rated frequency: 50...60 Hz
- Isolation class: E
- Width: 70 mm
- Height: 100 mm
- Depth: 115 mm
- Screw M12

Description	Type Name	Type Number	Primary Current	Secondary Current	VA	Accuracy Class
WSK 31.5 25/1A 2,5VA Kl.1	WSK	31.5	25	1	2,5	1
WSK 31.5 25/1A 5VA Kl.1	WSK	31.5	25	1	5	1
WSK 31.5 25/1A 10VA Kl.1	WSK	31.5	25	1	10	1
WSK 31.5 25/1A	WSK	31.5	25	1	15	1

15VA Kl.1

WSK 31.5 30/1A	WSK	31.5	30	1	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 30/1A	WSK	31.5	30	1	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 30/1A	WSK	31.5	30	1	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 30/1A	WSK	31.5	30	1	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 40/1A	WSK	31.5	40	1	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 40/1A	WSK	31.5	40	1	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 40/1A	WSK	31.5	40	1	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 40/1A	WSK	31.5	40	1	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 50/1A	WSK	31.5	50	1	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 50/1A	WSK	31.5	50	1	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 50/1A	WSK	31.5	50	1	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 50/1A	WSK	31.5	50	1	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 60/1A	WSK	31.5	60	1	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 60/1A	WSK	31.5	60	1	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 60/1A	WSK	31.5	60	1	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 60/1A	WSK	31.5	60	1	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 75/1A	WSK	31.5	75	1	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 75/1A	WSK	31.5	75	1	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 75/1A	WSK	31.5	75	1	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 75/1A	WSK	31.5	75	1	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 80/1A	WSK	31.5	80	1	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 80/1A	WSK	31.5	80	1	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 80/1A	WSK	31.5	80	1	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 80/1A	WSK	31.5	80	1	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 100/1A	WSK	31.5	100	1	2,5	1
-----------------	-----	------	-----	---	-----	---

2,5VA Kl.1

WSK 31.5 100/1A	WSK	31.5	100	1	5	1
-----------------	-----	------	-----	---	---	---

5VA Kl.1

WSK 31.5 100/1A	WSK	31.5	100	1	10	1
-----------------	-----	------	-----	---	----	---

10VA Kl.1

WSK 31.5 100/1A	WSK	31.5	100	1	15	1
-----------------	-----	------	-----	---	----	---

15VA Kl.1

WSK 31.5 150/1A	WSK	31.5	150	1	2,5	1
-----------------	-----	------	-----	---	-----	---

2,5VA Kl.1

WSK 31.5 150/1A	WSK	31.5	150	1	5	1
-----------------	-----	------	-----	---	---	---

5VA Kl.1

WSK 31.5 150/1A	WSK	31.5	150	1	10	1
-----------------	-----	------	-----	---	----	---

10VA Kl.1

WSK 31.5 150/1A	WSK	31.5	150	1	15	1
-----------------	-----	------	-----	---	----	---

15VA Kl.1

WSK 31.5 25/5A	WSK	31.5	25	5	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 25/5A	WSK	31.5	25	5	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 25/5A	WSK	31.5	25	5	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 25/5A	WSK	31.5	25	5	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 30/5A	WSK	31.5	30	5	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 30/5A	WSK	31.5	30	5	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 30/5A	WSK	31.5	30	5	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 30/5A	WSK	31.5	30	5	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 40/5A	WSK	31.5	40	5	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 40/5A	WSK	31.5	40	5	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 40/5A	WSK	31.5	40	5	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 40/5A	WSK	31.5	40	5	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 50/5A	WSK	31.5	50	5	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 50/5A	WSK	31.5	50	5	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 50/5A	WSK	31.5	50	5	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 50/5A	WSK	31.5	50	5	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 60/5A	WSK	31.5	60	5	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 60/5A	WSK	31.5	60	5	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 60/5A	WSK	31.5	60	5	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 60/5A	WSK	31.5	60	5	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 75/5A	WSK	31.5	75	5	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 75/5A	WSK	31.5	75	5	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 75/5A	WSK	31.5	75	5	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 75/5A	WSK	31.5	75	5	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 80/5A	WSK	31.5	80	5	2,5	1
----------------	-----	------	----	---	-----	---

2,5VA Kl.1

WSK 31.5 80/5A	WSK	31.5	80	5	5	1
----------------	-----	------	----	---	---	---

5VA Kl.1

WSK 31.5 80/5A	WSK	31.5	80	5	10	1
----------------	-----	------	----	---	----	---

10VA Kl.1

WSK 31.5 80/5A	WSK	31.5	80	5	15	1
----------------	-----	------	----	---	----	---

15VA Kl.1

WSK 31.5 100/5A	WSK	31.5	100	5	2,5	1
-----------------	-----	------	-----	---	-----	---

2,5VA Kl.1

WSK 31.5 100/5A	WSK	31.5	100	5	5	1
-----------------	-----	------	-----	---	---	---

5VA Kl.1

WSK 31.5 100/5A	WSK	31.5	100	5	10	1
-----------------	-----	------	-----	---	----	---



10VA Kl.1

WSK 31.5 100/5A	WSK	31.5	100	5	15	1
-----------------	-----	------	-----	---	----	---

15VA Kl.1

WSK 31.5 150/5A	WSK	31.5	150	5	2,5	1
-----------------	-----	------	-----	---	-----	---

2,5VA Kl.1

WSK 31.5 150/5A	WSK	31.5	150	5	5	1
-----------------	-----	------	-----	---	---	---

5VA Kl.1

WSK 31.5 150/5A	WSK	31.5	150	5	10	1
-----------------	-----	------	-----	---	----	---

10VA Kl.1

WSK 31.5 150/5A	WSK	31.5	150	5	15	1
-----------------	-----	------	-----	---	----	---

15VA Kl.1